EP802-TM

FLEXIBLE, MODULAR DESIGN

Compatible with compact shelf & door mounts

ULTRA-FAST PRINTING SPEED

Reduces wait time & increases customer connections

SMART BEZEL

Combined anti-block & anti-drag system ensures ticket delivery to the customer

HIGHLY RELIABLE CUTTERMTBF over 1,000,000 cuts

CUSTOM FUNCTIONS

Full & partial cut optionLabel printing option

COMPLETE PACKAGE Includes printer, bezel and harness

JCM PART NO: 23101099

THE EP802-TM IS AN IDEAL PRINTER SOLUTION FOR ALL-ROUND PERFORMANCE.

The Eurocoin EP802-TM Thermal Printer has been developed for a wide range of applications to meet all customers' needs: sports betting, gaming and lottery, kiosks, parking systems and more. The TM model offers proven flexibility with a modular approach, to provide customers the ideal printer to suit multiple cabinet styles. Serviceability with rear access also provides easy maintenance and auto-paper loading for the user.



EP802-TM

GENERAL SPECIFICATIONS

Barcodes Full Support

Buffer 1 MB

Command Set ESC/POS SDK (available)

Dimensions (WxHxD) 125 (W) x 87 (H) x 137 (D) mm

Dot Pitch 8 dots/mm

Dots Per Line 640 dots/line

Drivers USB Drivers Windows 32 + 64bit, Linux

Environment

Operating Temperature: -10°C to +60°C Storage Temperature: -20°C to +70°C Storage Temperature: 10 to 90% RH Work Humidity: 20 to 85% RH

Interface RS-232/USB

Paper

Paper Roll Diameter: 80mm or 150mm Paper Thickness: 55 to 80gsm Paper Width: 60/80/82.5mm

Paper Feed Direction 180° Horizontal

Paper Loading Easy Loading Printing Method Thermal


Printing Speed < 250 mm/s

Power Supply Logic Circuit - 3.3 V Motor - 24 V DC 24V / 2.5A

Reliability Cutter - over 1,000,000 cuts Thermal Head - over 100 km

Sensors Head Temperature - Thermistor Paper End - Photo Interrupter Paper Press Shaft - Switch

Weight Approx. 1.25 kg

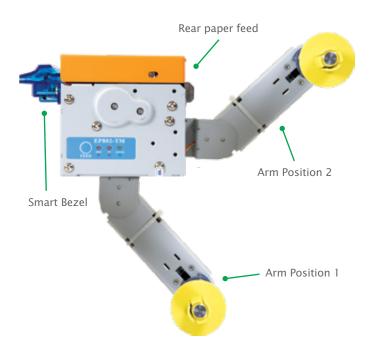



THE AMERICAS HEADQUARTERS JCM American Corporation 925 Pilot Road Las Vegas, NV 89119

USA

Tel: 800-683-7248 (800# for USA, Canada & Mexico) Tel: 702-651-0000



JCM Global, JCM Global logo, and other marks used herein are trademarks and registered trademarks of Japan Cash Machine Co., Ltd. and JCM American Corporation. Additional marks are registered trademarks of their respective owners. JCM Global reserves the right to change product specifications without notice.